
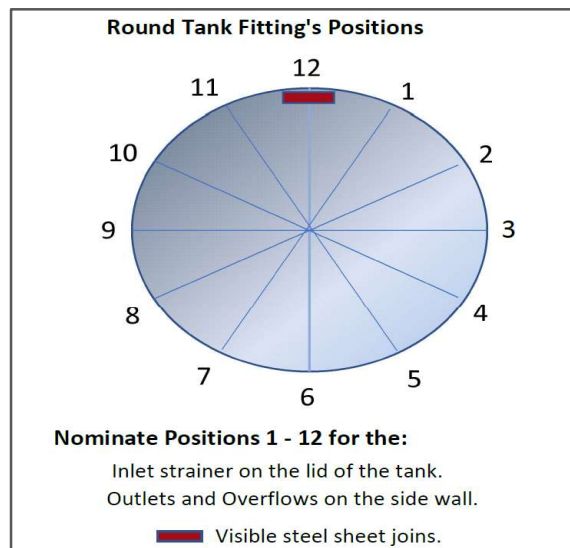


Your STANDARD FITTING'S POSITIONS

At Select Water Tanks, each tank has 3 standard fittings included: a **25mm Outlet with ball valve**, a **90 or 100mm Overflow with gauze end cap** and a **400mm Inlet strainer with light guard**.

You nominate the required positions for these fittings on your tank, using our diagrams below, on the Slimline / Round order forms that are sent with your quote.

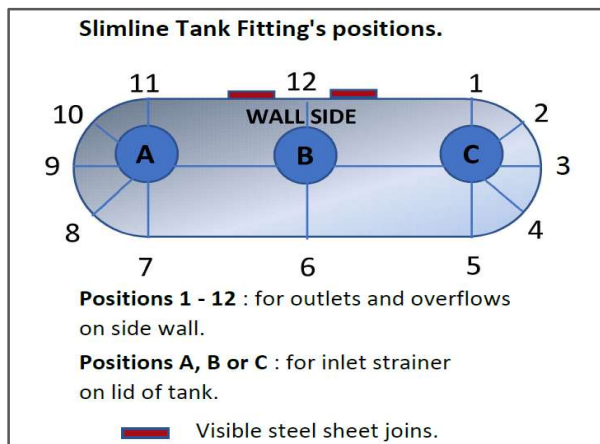

Rainwater enters the tank through the **400mm INLET STRAINER WITH LIGHT GUARD** on the lid of your tank. The light guard prevents Ultra Violet light entering your tank, preventing your rainwater from being exposed to UV light that can encourage algae growth. (500mm Inlet strainer also available).



90mm or 100mm OVERFLOW Each water tank requires an OVERFLOW that is installed at the top of the wall, directly under the lid. Water tanks with a capacity of 10,000 or less are fitted with a 90mm PVC corrugated over-flow body. Larger tanks are fitted with a 100mm overflow body. A **mosquito proof gauze** is supplied with each overflow. This also prevents frogs, toads and vermin from entering the water tank.



Stainless Steel version

A **25mm OUTLET** is fitted at the base of the tank, as shown in the images for the Stainless Steel and Aquaplate tanks. The **BALL VALVE** is supplied for installation after delivery. You can also include a **50mm outlet and ball valve** installed another corrugation above. This allows for efficient water balancing when interconnecting tanks. The **50mm outlet** also protects the pumps and internal water appliances as it draws the water from above the sludge / anaerobic level.



Aquaplate / Colorbond Version